


# Technical datasheet

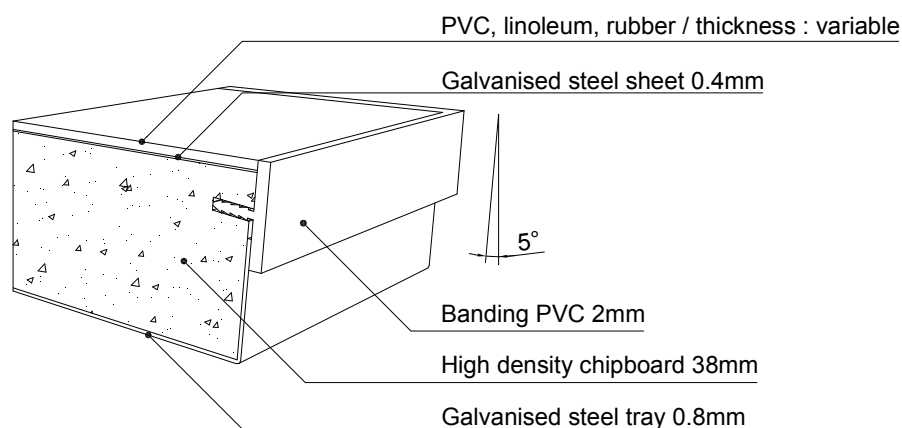

## Edge trim

Tested according the British PSA/MOB norm

### General characteristics

|              |   |  |
|--------------|---|--|
| Measurements | : | 600 x 600 mm   |
| Weight       | : | +/- 15 kgs   |
| Core         | : | 38 mm chipboard - density 760 kgs/m <sup>3</sup> -E1 - 2 copper feathers |
| Bottom side  | : | Galvanised steel 0,8mm   |
| Upper side   | : | Galvanised steel 0,4mm + PVC 2mm   |
| Edge banding | : | PVC 2 mm—T-profile   |

### System characteristics

|  |   |                             |
|--|---|-----------------------------|
| Class of element                                       | : | 4                           |
| Ultimate load  | : | ≥ 13,5 kN                   |
| Safety factor  | : | 3                           |
| Point load<br>(= ultimate load/safety factor)          | : | 4,5 kN                      |
| Class of deflection<br>(max 2,5mm deflection by 4,5Kn) | : | A                           |
| Divided load per m <sup>2</sup><br>(Theoretical value) | : | 22,5kN—27kN /m <sup>2</sup> |

### Fire characteristics

|                 |   |                               |
|-----------------|---|-------------------------------|
| Fire resistance | : | F30 according DIN 4102-2      |
| Fire reaction   | : | Class B1 according DIN 4102-1 |

### Electrical resistance

≥10<sup>5</sup> <10<sup>7</sup>Ω

Other values are possible by the use of conductive banding and conductive glue.

complete certificates on request

Jansen Products NV

Fabriekstraat 4  
3670 Meeuwen  
BELGIUM

Tel : +32 11 79 33 00  
Fax: +32 11 79 33 01  
info@jansenproducts.be  
www.groupjansen.com

 **jansen** PRODUCTS NV  
INTERNATIONAL