


Technical datasheet

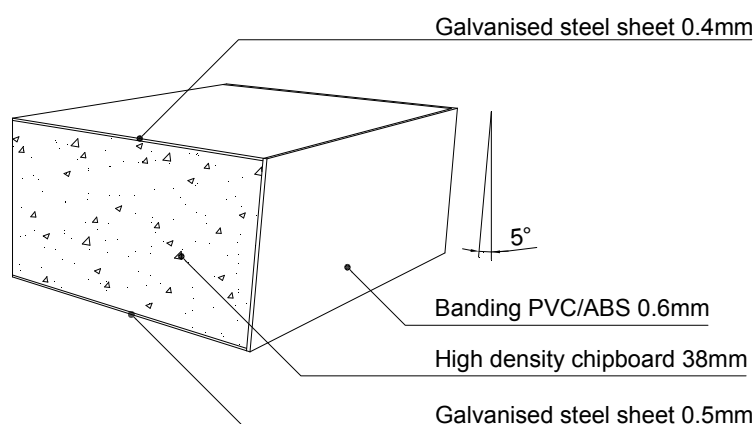

38 HSS-AS

Tested according the European norm 12825

General characteristics

| | | |
|--------------|---|------------------------------------------------------|
| Measurements | : | 600 x 600 mm |
| Weight | : | +/- 12,5 kgs |
| Core | : | 38 mm chipboard - density 720 kgs/m ³ -E1 |
| Bottom side | : | Galvanised steel 0,5mm |
| Upper side | : | Galvanised steel 0,4mm |
| Edge banding | : | PVC/ABS 0,6 mm |

System characteristics

| | | |
|--------------------------------------------------------|---|---------------------------|
| Class of element | : | 2 |
| Ultimate load | : | ≥ 6 kN |
| Safety factor | : | 2 |
| Point load (= ultimate load/safety factor) | : | 3 kN |
| Class of deflection (max 2,5mm deflection by 3Kn) | : | A |
| Divided load per m ² (Theoretical value) | : | 15kN–20kN /m ² |

Fire characteristics

| | | |
|-----------------|---|-------------------------------|
| Fire resistance | : | F30 according DIN 4102-2 |
| Fire reaction | : | Class B1 according DIN 4102-1 |

Electrical resistance

≥10⁹ <10¹⁰Ω

Other values are possible by the use of conductive banding and conductive glue.

complete certificates on request

Jansen Products NV

Fabriekstraat 4
3670 Meeuwen
BELGIUM

Tel : +32 11 79 33 00
Fax: +32 11 79 33 01
info@jansenproducts.be
www.groupjansen.com

 **jansen** PRODUCTS NV
INTERNATIONAL